


# Nickel-Aluminum Tabs For Soft Pack Lithium Batteries

Item Number: BC-11

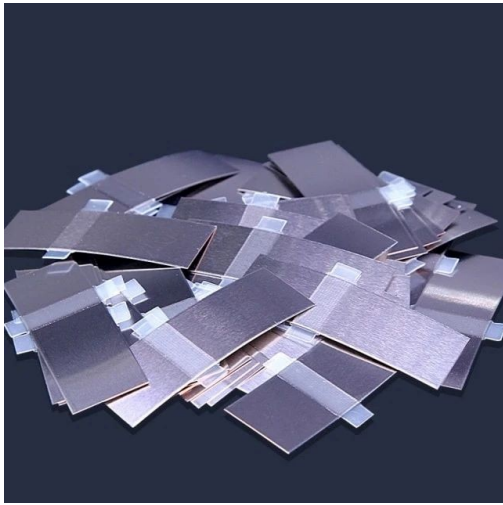

## Introduction

Nickel tabs are used to manufacture cylindrical and pouch batteries, and positive aluminum and negative nickel are used to produce lithium-ion and nickel batteries.

[Learn More](#)

Negative electrode material	nickel	Cathode material	aluminum
tape material	white glue	tape material	J7-100
Substrate thickness	0.1±0.1mm	Substrate thickness	0.1±0.01mm
width	10±0.1mm	width	4±0.1mm
unit length	50±1mm	unit length	60±1mm
tab tape width	5±0.5mm	tab tape width	4±0.5mm
Total thickness of tab	0.3±0.02mm	Total thickness of tab	0.3±0.02mm
Adhesive strength between tab and tape	>7N/15mm	Adhesive strength between tab and tape	>7N/15mm
Corrosion resistance	Soaked in the electrolyte for 4 hours at 85°C, the material is stable, and the bonding between the lug and the substrate is stable.		